


Flow Through Gas Sampling Cylinder

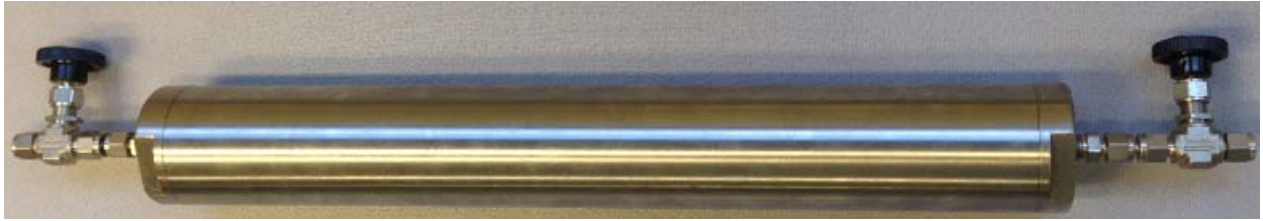

DESCRIPTION:

10000 PSI Sample Cylinder for gas sampling.

Suitable for use in any ambient condition to be expected outdoor, subject to the specified temp, limitations, including offshore platforms, onshore terminals and sites in tropical areas.

Valves in endcap with 1/4" NPT, female ports.

Transportation box available.

TYPE

Model:	10000 PSI Sample Cylinder
GA-drawing no:	N/A
Net volume:	700-1000 cc
Filling pressure:	10000 psi @ 21 °C
Working temp.:	-20 to 100 °C
Material:	Titan. Valves in 316 SS
Net weight (kg):	3,9 kg
Dimensions (mm):	(OD x H x L) ø 65 x 80x 620 with valves.

Service:	Argon CO Helium Hydrocarbon Gas Mixture H2S – Hydrocarbon Sulphide Hydrogen Natural Gas with Metane content Nitrogen Compressed Petroleum Gas, Liquiefied or Liquiefied Petroleum Gas Compressed gas, toxic, flammable, N.O.S inhalation Hazard Zone B
----------	---

DOCUMENTATION

Standard:	Certificate of conformity. Manufacturing Declaration of conformity with: 97/23/EC PED
-----------	--